



# SW 400 GR

Seawater RO membrane with excellent salt rejection and proven, long-lasting reliability

## Key Features

- Excellent salt rejection with competitive energy consumption
- Excellent boron rejection
- Improved fouling resistance due to thicker feed spacer

## Main Benefits

- A combination of excellent permeate water quality and energy efficiency
- Well-proven, long-lasting reliability

## Ideal Applications

- Single and multi-pass desalination plant design


## Performance Specifications

Item	Unit	Value
Permeate Flow Rate	GPD (m <sup>3</sup> /d)	7,500 (28.4)
Stabilized Salt Rejection	%	99.85
Minimum Salt Rejection	%	99.7
Stabilized Boron Rejection	%	93
Active Membrane Area	ft <sup>2</sup> (m <sup>2</sup> )	400 (37)
Feed Spacer Thickness	mil	34

The specifications outlined above are normalized performances based on the following test conditions:

- **Test Conditions:** 32,000 ppm NaCl, 5 ppm Boron, 800 psi (55.1 bar), 25°C (77°F), pH 8, Recovery 8%
- Permeate flow rates for individual elements may vary by ±15%

## Dimensions and Weight

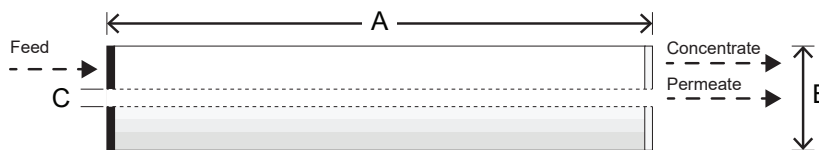

Dimensions: mm (in)			Wet Weight: kg (lbs)
A	B	C	16 (35)
Element Length	Element O.D.	Core Tube I.D.	
1,016 (40)	200 (7.9)	28.6 (1.125)	

All dimensional information is indicative and for reference only. Please contact NanoH2O for detailed technical specifications.

## Operating Specifications

Specification	Unit	Value
Maximum Applied Pressure	psi (bar)	1,200 (82.7)
Maximum Chlorine Concentration	ppm	< 0.1
Maximum Operating Temperature	°C (°F)	45 (113)
pH Range, Continuous Operation		2–11
pH Range, Cleaning		1–13
Maximum Feed Water Turbidity	NTU	1.0
Maximum Feed Water SDI <sub>15</sub>		5.0
Maximum Feed Flow	gpm (m <sup>3</sup> /h)	75 (17)
Maximum Pressure Drop (ΔP) for Each Element	psi (bar)	15 (1.0)

These operating specifications are for general use. For specific applications, operation at more conservative values may ensure better performance and extended membrane life. See NanoH2O Technical Bulletins for more details.



Homepage



LinkedIn



Youtube



This product is certified to NSF/ANSI/CAN Standard 61 for drinking water systems